



**Southern Africa
Association**

Compressed Gases


*P.O. Box 1334, Kelvin, 2054, South Africa, Tel / Fax: + 27 (0) 11 803 5659
e-mail: sacgass@iafrica.com Website: www.sacga.za.org*

Technical Information Sheet - TIS No 8 : 2005

Information for Customers Collecting Gas Cylinders (Flammable, Inert and Oxidising Gases)

1

Check the cylinder label and confirm that it is the gas you require. If you are unfamiliar with the hazards and properties of the gas please ask for the safety data sheet.



2

Ensure that you read the safety data sheet. Take time to understand the properties and hazards associated with the gas before transporting or using it. If in doubt ask the supplier for advice. Know what to do in an emergency: evacuate the vehicle/room/workspace and contact your gas supplier for further advice.



3

Cylinders are heavy, handle with care. If you are moving large cylinders, use a trolley, or seek help. Take care when handling. Close the valve before moving the cylinder. Do not drop cylinders. Never try to catch a falling cylinder.



4


Use appropriate protective equipment, see the safety datasheet. It is recommended that eyes, hands and feet are protected when handling or using cylinders.



5

An open vehicle is recommended for the carriage of all cylinders. This is particularly important for acetylene and LPG cylinders which should be transported and stored upright. If a closed vehicle is used ensure there is adequate ventilation. It is recommended to drive with a window open.

Secure the cylinder in the boot/load area and remove the cylinder from the vehicle as soon as the journey is completed.

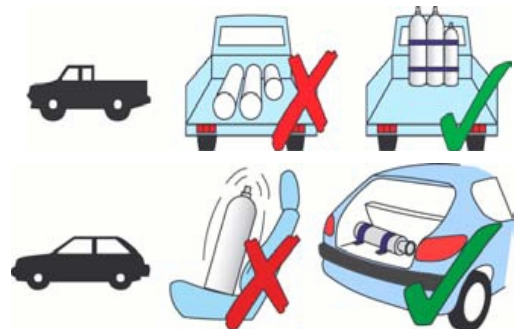

6

When you get to your destination store in a secure and well-ventilated location, where it cannot be damaged or tampered with. It will assist the Emergency Services if storage areas are labeled, particularly if acetylene cylinders are being stored.



7

Keep cylinders cool and away from heat sources flammable or corrosive material and oil.




8

Use in a well-ventilated area. Do not smoke or use direct heat on a cylinder. Turn the cylinder valve off when it is not being used.



9


Always use a regulator suitable for the gas and pressure. Do not connect directly to the cylinder valve. The pressure within the cylinder can be up to 300 bar (some 150 times the pressure you put into your car tyre).

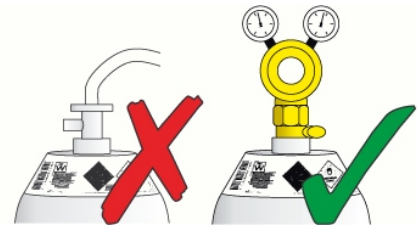

10

Never use oil or grease on a cylinder valve, it is dangerous. If the valve is tight return the cylinder to the supplier and obtain a replacement.

Do not use excessive force to open the valve.

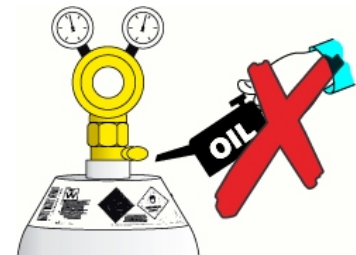

11

When the cylinder is empty or you have finished with it, please return it to the supplier. Valves must be closed before transporting see 3 and 4 above.



For further information concerning this subject, it is recommended that you read the BCGA Guidance Note 3 and Leaflet L1

Thank you for reading and following this guidance, it will help to ensure your safety
For further technical and safety information, please contact your supplier



Acknowledgment
Southern Africa Compressed Gases Association
would like to thank the
British Compressed Gases Association
for permission to re-print this information



DISCLAIMER

The information contained in this document was obtained from sources believed to be reliable and is based on technical information and experience currently available from members of the Southern Africa Compressed Gases Association and others.

However, the Association or its members, jointly or severally, make no guarantee of the results and assume no liability or responsibility in connection with the information or suggestions herein contained.

Moreover, it should not be assumed that every acceptable commodity grade, test or safety procedure or method, precaution, equipment or device is contained within, or that abnormal or unusual circumstances may not warrant or suggest further requirements or additional procedure.